

AR324-4

TVI HD DVR



Features and Functions

Video Input and Transmission

- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- 1ch 4 MP IP cameras input
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTVI signal

Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Up to 3 MP resolution for recording
- Support real-time 1080p lite and when enabled, the image effect is similar with 1080p

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for AR324-16
- Separate CVBS output

Storage and Playback

- 1 SATA interfaces (up to 6 TB capacity per HDD)
- 4ch synchronous playback
- Smart search for efficient playback
- Support 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- AR324-4 support 2-ch line crossing detection and intrusion detection
- VQD (Video Quality Diagnostics)
- Support PTZ control via Omnicast VMS of Genetec protocol

Network & Ethernet Access

- GuardingVision & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M Ethernet network interface for AR324-4
- Output bandwidth limit configurable

AR324-4


TVI HD DVR

| Model | AR324-4 | |
|----------------------|---------------------------|---|
| Video/Audio input | Video compression | H.265+/H.265/H.264+/H.264 |
| | Analog video input | 4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection |
| | HDTVI input | 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 Note: The 3 MP signal input is only available for channel 1 of AR324-4, |
| | AHD input | 1080p25, 1080p30, 720p25, 720p30 |
| | HDCVI input | 1080p25, 1080p30, 720p25, 720p30 |
| | CVBS input | PAL/NTSC |
| | IP video input | 1-ch Up to 4 MP resolution Supports H.265+/H.265/H.264+/H.264 IP cameras |
| | Audio compression | G.711u |
| | Audio input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Video/Audio output | CVBS output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| | HDMI/VGA output | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| | Encoding resolution | When 1080p Lite mode not enabled: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF |
| | Frame rate | Main stream: When 1080p Lite mode not enabled: For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 3 MP@15fps 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N) |
| | Video bit rate | 32 Kbps to 6 Mbps |
| | Audio output | 1-ch, RCA (Linear, 1 KΩ) |
| | Audio bit rate | 64 Kbps |
| | Dual stream | Support |
| | Stream type | Video, Video & Audio |
| | Synchronous playback | 4-ch |
| Network management | Remote connections | 128 |
| | Network protocols | TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF |
| Hard disk | SATA | 1 SATA interfaces |
| | Capacity | Up to 6 TB capacity for each disk |
| External interface | Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 st audio input) |
| | Network interface | 1, RJ45 10M/100M self-adaptive Ethernet interface |
| | USB interface | 2 × USB 2.0 |
| | Serial interface | RS-485 (half-duplex) |
| General | Power supply | 12 VDC |
| | Consumption (without HDD) | ≤ 6 W |
| | Working temperature | -10 °C to +55 °C (+14 °F to +131 °F) |
| | Working humidity | 10% to 90% |
| | Dimensions (W × D × H) | 315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch) |
| Weight (without HDD) | ≤ 1.16 kg (2.6 lb) | |

AR324-4

TVI HD DVR

Physical Interfaces

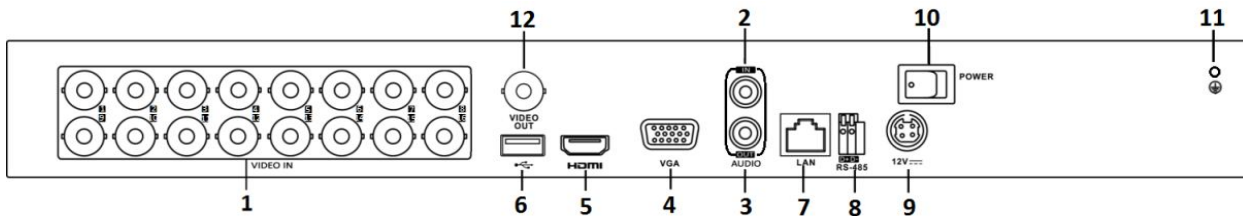

NOTE The rear panel of AR324-4/324-8 provides 4/8 video input interfaces.

| Index | Description | Index | Description |
|-------|--------------------------|-------|-------------------------|
| 1 | VIDEO IN | 7 | LAN Network Interface |
| 2 | AUDIO IN, RCA Connector | 8 | RS-485 Serial Interface |
| 3 | AUDIO OUT, RCA Connector | 9 | 12 VDC Power Input |
| 4 | VGA Interface | 10 | Power Switch |
| 5 | HDMI Interface | 11 | GND |
| 6 | USB Interface | 12 | VIDEO OUT |